


NEC MultiSync® P495-MPi4  
LCD 49" Professional Large Format Displays (incl. NEC MediaPlayer)

## Datasheet

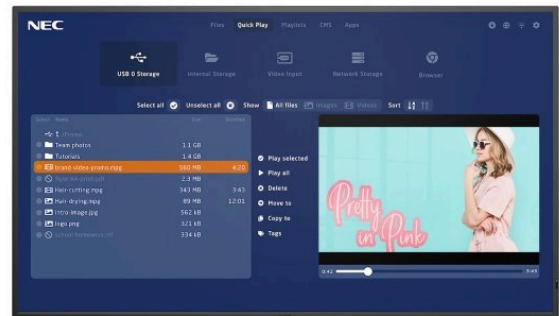

### When imaging precision cannot be compromised

When imaging precision and 24/7 operational reliability cannot be compromised, the 5th generation of NEC MultiSync® P series presents best-in-class performance with an advanced feature set for mission-critical applications.

Even in bright ambient light conditions, high brightness levels of 700 cd/m<sup>2</sup> combined with a high haze filter guarantees exceptional readability with no annoying reflections. Despite its slim, elegant profile, the quality build is robust for use in public spaces, with an all-metal chassis for fire-retardancy. Featuring the pre-installed NEC MediaPlayer you get an out of the box signage experience and can playback the content needed for your application: video, picture, html or use any of the supported Content Management Systems (CMS).

For best visualisation in control rooms and production lines, for passenger information and wayfinding signage; the NEC P-MPi4 series is trusted for safety and long-life, fit-for-purpose performance..

## Benefits

**Wide colour gamut** - high-performance panel technology delivers a wider spectrum of colours for a superb visual experience

**Intuitive Plug & Play solution** - even when not familiar with using digital signage, users can facilitate stunning signage creation for immersive real-time visual experiences

**Install third party software** - expand the NEC MediaPlayer functionality via additional Apps or even switch to your preferred Content Management Systems (CMS) directly from of the NEC MediaPlayer

**Everything under control** - one single interface is needed to manage both the NEC MediaPlayer and the display directly, via a web-interface or the NEC Display remote control.

**Unhindered readability** - no reflections from windows or other light sources means no disruption to the visibility of signage content or meeting room presentation

## Product Information

Product Name	NEC MultiSync® P495-MPi4
Product Group	LCD 49" Professional Large Format Displays (incl. NEC MediaPlayer)
Order Code	60005377

## Display

Panel Technology	IPS with Edge LED backlights
Screen Size [inch/cm]	49 / 124.5
Aspect Ratio	16:9
Brightness [cd/m <sup>2</sup> ]	700
Contrast Ratio	≥ 8000:1 <sup>1</sup>
Viewing Angle [°]	178 horizontal / 178 vertical (typ. at contrast ratio 10:1)
Colour Depth [bn]	1.073 (10bit)
Colour Gamut	86% of DCI
Response Time (typ.) [ms]	8
Panel Refresh Rate [Hz]	60
Haze Level [%]	Pro (28)
Supported Orientation	Landscape, Portrait, Face Up, Face Down <sup>2</sup>

## Synchronisation Rate

Horizontal Frequency [kHz]	15 - 135
Vertical Frequency [Hz]	23 - 76

## Resolution

Native Resolution	3840 x 2160			
Supported Resolutions	7680 x 4320; 4096 x 2160; 3840 x 2160; 2560 x 1600;	2560 x 1440; 1920 x 2160; 1920 x 1080; 1600 x 1200;	1440 x 900; 1400 x 1050; 1366 x 768; 1360 x 768;	1280 x 1024; 1024 x 768

## Connectivity

Input Video Digital	2 x DisplayPort (with HDCP); 2 x HDMI (with HDCP)
Input Audio Digital	1 x DisplayPort; 2 x HDMI
Input Control	LAN 100Mbit; remote control wire (3,5mm jack); RS232
Input Data	1 x USB 2.0 (Downstream); 1 x USB 2.0 (Powered 5V/2A, Firmware Updates); 1 x USB 2.0 Type-B (Downstream)
Output Video Digital	1 x DisplayPort (loop through: DisplayPort, SDM slot-in PC); 1 x HDMI (loop through: HDMI, SDM slot-in PC)
Output Audio Analogue	1 x 3,5 mm jack
Output Control	1 x LAN 100Mbit
Input Detect	Custom; First; Last
PIP/PbP	Dual-Split; Quad-Split; scalable picture size

## Calibration

Factory Calibration	Gamma; Intensity; RGB; Uniformity; White Point
Sensor Calibration (through USB)	PC-less Calibration with USB Sensor MDSV Sensor3; White Copy (post self-calibration)
Calibration with Software	Corner Uniformity; Gamma; Intensity; RGB; Update Factory Calibration; White Point
Calibration Software	NEC Display Wall Calibrator

## Open Modular Intelligence

Intel® SDM	accepts Intel® Smart Display Modules Large and Small up to 66 W
Compute Module Slot	RPi Compute Module 4

## Sensors

Ambient Light Sensor	Integrated, triggered actions programmable
Temperature Sensor	Integrated, 3 sensors, triggered actions programmable

## Electrical

Power Consumption Eco/max. [W]	105 shipping
Power Savings Mode [W]	< 0.5; < 2 (Networked Standby)
Power Management	VESA DPMS
Power Supply	100-240 V AC; 50/60 Hz; internal

## Environmental Conditions

Operating Temperature [°C]	+0 to +40
Operating Humidity [%]	20 to 80
Storage Humidity [%]	10 to 90
Storage Temperature [°C]	-20 to 60

## Mechanical

Dimensions (W x H x D) [mm]	1,103.4 x 636.2 x 61.1
Weight [kg]	22.9
Bezel Width [mm]	12 (top and bottom); 12.5 (left and right); 15.6 (bottom)
VESA Mounting [mm]	300 x 300 (FDMI); 4 holes; M6
Ingress Protection	IP5x (front); IP2x (back)
Packaging Dimensions (W x H x D) [mm]	1,298 x 860 x 224
Packaging Weight [kg]	29.8
Colour Bezel	Pantone 426M (black)
Material	Metal

## MediaPlayer

Supported File Storage / File System	USB 2.0 / FAT16, FAT32
Internal Storage	32GB eMMC (2GB occupied by OS, 28GB available for files)
Processor	Cortex-A72 (ARMv8) 64-bit SoC @ 1.5GHz
Supported Image Formats	JPG / JPEG; PNG
Supported Video Formats	MP4 / MOV / AVI / MPEG / WMV / MPG / M4V / VOB / MKV (H.265); MPEG-2; M4K; VP8 / VP9; HTML5
Supported Audio Formats	MP3; AAC; AC-3

## Available Options

Accessories	Feet (ST-401/ST-43M); Soundbar (passive: SP-PSCM-IQ / SP-PSCM); Speaker (SP-TF1, SP-RM3); Trolley (PDMHM-L); Wall mount (PDW C L and P, PD02W T M L, PD03W T M P)
-------------	---

## Green Features

Energy Efficiency	Energy consumption: 106 kWh/1000 h; Energy efficiency class: G; LED backlight
Ecological Standards	EnergyStar 8.0

## Additional Features

Special Characteristics	DICOM Simulation; HDMI ARC; Powered USB Port (10 W); Removable Logo
Safety and Ergonomics	BSMI; CE; EAC; EMC Class B; Energy Star 8; FCC Class B; KC/KCC; PSB; RCM; RoHS; VCCI
Pixel Failure Class	ISO 9241-307, Class 1
Shipping Content	2x AAA batteries; Display; HDMI Cable; Power Cable; Pre-installed MPi4 MediaPlayer Kit; Remote Control; Setup Manual
Warranty	3 years warranty incl. backlight; additional services available; optional 4. + 5. year warranty extension <sup>3</sup>
Operating Hours	24/7
External Control	AMX NetLinx Support; ASCII Control Commands; Crestron Connected; HDMI CEC; HTTP Browser; PJLink; Scheduled Timer; SNMP
Remote Management	Automated Email Alerts; NEC NaViSet Administrator 2
Security	Disable HW Buttons; Disable IR Functionality; Emergency Notification
Resistance to Fire	Metal backcover, plastic material certified acc. to UL94-5VB

<sup>1</sup> out of the box conditions, local dimming ON

<sup>2</sup> adjusted usage conditions for face up/down installations, please refer to operational guidelines or contact our support

<sup>3</sup> please refer to terms and conditions of warranty extensions



RoHS



FCC Class B



VCCI



CE



RCM

This document is © 2021 Sharp NEC Display Solutions Europe GmbH.

All rights reserved in favour of their respective owners. All hardware and software names are brand names and/or registered trademarks of the respective manufacturers. All specifications are subject to change without notice. Errors and omissions are excepted. 07.09.2021