

# DATA SHEET



## USB-C Travel Dock with Hub

Connect a USB-C device to a display while connecting to two USB devices and wired Ethernet

### OVERVIEW

The USB-C Travel Dock with Hub is the perfect solution for connecting a USB-C computer to an HDMI, DisplayPort, or VGA display when in the office or on the go. Supporting HDMI and DisplayPort resolutions up to 4K at 60Hz—while also providing Gigabit Ethernet—enables the USB-C Travel Dock with Hub to meet your connectivity needs and handle critical tasks so that you can rest easy knowing that you have the connection you need. The included USB-C Hub has 2 USB-A ports and a RJ45 Gigabit Ethernet port. Simply connect the hub to the travel dock to ensure you're prepared for the big presentation.

The Travel Dock is a great means to connect to nearly any display for that big meeting or presentation. The Dock is purposefully engineered to allow a USB-C enabled computer or tablet to connect to a display with HDMI, VGA, or DisplayPort inputs and features a USB Type-C port with power delivery.

The USB-C Connectivity Hub brings additional connections to the Travel Dock to meet all connectivity needs. The Hub is equipped with a USB-C port for plugging in mobile devices, two USB-A ports for connecting peripherals or portable storage, and an RJ-45 port for Gigabit Ethernet. Connect a USB-C power source to the Travel Dock to provide the necessary power for the Hub to function.

### FEATURES

- Tethered USB-C Male cable for easy connection
- USB-C capability—a reversible, high-power connection
- Maximum VGA resolution: 2048x1536
- HDMI and DisplayPort support up to 4K60
- Gigabit Ethernet

### ITEM DESCRIPTION

82392      USB-C Travel Dock with Hub

designed to be better.™











# DATA SHEET

## SPECIFICATIONS: USB-C Travel Dock with Hub

### PHYSICAL SPECIFICATIONS

- Operating Temperature: 0°C to 40°C (RH = 15~85%)
- Storage Temperature: 0°C to 70°C (RH = 15~85%)

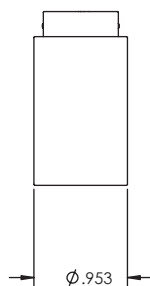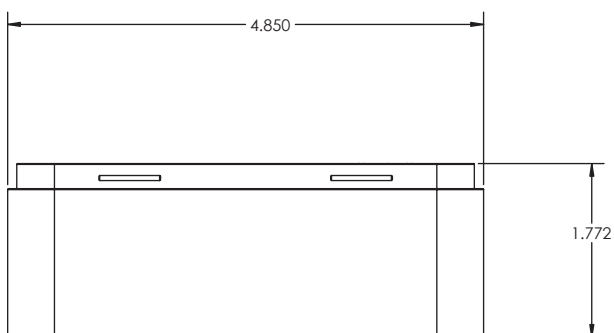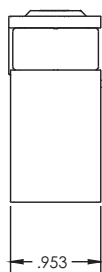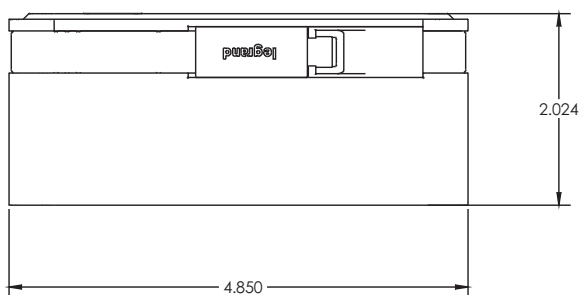

### PHYSICAL CHARACTERISTICS

- Travel Dock Dimensions (HxWxD): 5in x 2in x 1in (123.2mm x 51.4mm x 24.2mm)
- Travel Dock Weight: ~3.8 oz.
- Travel Dock Connectors: tethered USB-C male, rear USB-C female, VGA female, DisplayPort female, HDMI female, USB-C female
- Hub Dimensions (HxWxD): 5in x 1.75in x 1in (123.2mm x 45mm x 24.2mm)
- Hub Weight: ~3.5 oz.
- Hub Connectors: USB-C port, 2 USB-A female, Ethernet port, front USB-C male



Great King Street North  
Birmingham, West Midlands B19 2LF  
UK Phone (0)800 328 2916  
EMEA Phone +44 (0)1952 677300  
[www.c2g.com/uk](http://www.c2g.com/uk)

Follow Us

